

צמוד תקרה בעל יעילות אורית גבוהה 100Lm/W, שטף אורי מרשים וגוון אור משתנה לבחירה. התקנה קלה ופשוטה. מתאים לשימוש בבתים, חדרי מדרגות, לובי, משרדים ועוד.


מק"ט - 17700025

דגם - YT-CL42-50 WOOD G

קישור לדף מוצר ואביזרים נלווים באתר



2Years Guarantee | VALUE | 220-240V 50-60Hz | IP20 | IP44 | מתאים לדרשות התקן הישראלי

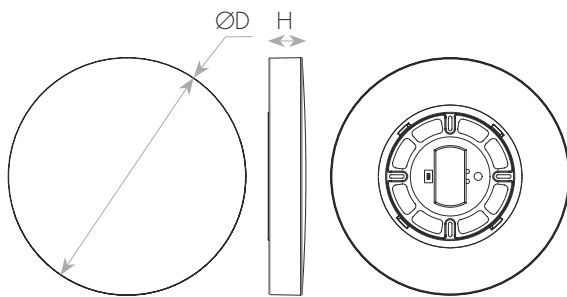

### DIMENSIONS & WEIGHT

### מידות ומשקל

Height	45mm
Diameter	500mm
Product weight	1210g

### MATERIALS & COLORS

### מבנה וגימור

Product color	Maple tree
Body material	Polypropylene
Cover finishing	milky
Cover material	PS
Lens material	PC

## ELECTRICAL DATA

## נתונים חשמליים

Nominal wattage	50W
Nominal current	0.21A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver output current	105mA
Dimmable driver mode	No
Power factor	>0.97
THDi	<13%

## CERTIFICATES & STANDARDS

## תקנים

Nisko Class	VALUE 2 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=25°C
LM79	√
IP 60529	IP20/IP44
ISO 9001	√

## APPLICATION & MOUNTING

## יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP20/IP44
Ambient temperature range	-10...+45°C

## PERFORMANCE

## ביצועים

Lifespan (Hr)	25000Hrs
TM21	√ Ta=25°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>45000Hrs

## PHOTOMETRIC DATA

## אופטיקה

Luminous efficacy	100Lm/W
Luminous flux	5000Lm
CCT	3000/4000/6000K
CRI	>84
LED manufacturer	PUSISAT
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%