

צמוד תקרה מזהב בעל יעילות אורית גבוהה 100Lm/W, שטף אורי מרשים וגוון אור משתנה לבחירה. התקנה קלה ופשוטה. מתאים לשימוש בבתיים, חדרי מדרגות, לובי, משרדים ועוד.


מק"ט - 17700038

דגם - YT-CL42-50 G

קישור לדף מוצר ואביזרים נלווים באתר



2Years Guarantee | VALUE | 220-240V 50-60Hz | IP20 | IP44 | מתאים לרשימת התקן הישראלי ✓

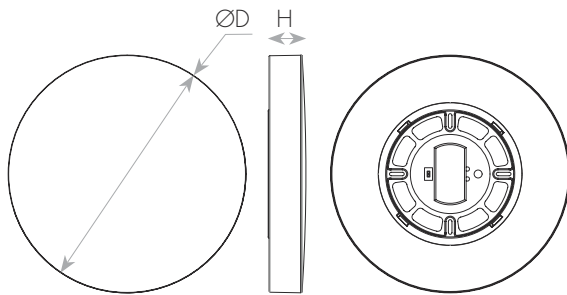

DIMENSIONS & WEIGHT

מידות ומשקל

Height	45mm
Diameter	500mm
Product weight	1210g

MATERIALS & COLORS

מבנה וגימור

Product color	gold
Body material	Polypropylene
Protection class IEC 62262	IK04
Cover finishing	milky
Cover material	PS
Lens material	PC

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	50W
Nominal current	0.21A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver output current	105mA
Dimmable driver mode	No
Power factor	>0.97
THDi	<13%

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 2 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=25°C
LM79	√
IP 60529	IP20/IP44
Protection class IK 62262 (shock resistance)	IK04
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP20/IP44
Ambient temperature range	-10...+45°C

PERFORMANCE

ביצועים

Lifespan (Hr)	25000Hrs
TM21	√ Ta=25°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>45000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	100Lm/W
Luminous flux	5000Lm
CCT	3000/4000/6000K
CRI	>84
LED manufacturer	PUSISAT
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%