

גוף תאורה לד על הטיח 30X120 בהספק של 50W. שטף אור 5000Lm. דרייבר ללא ריצוד. גוון האור ניתן לכיוון לבחירה. התקנה קלה מאד. מיועד לבתים פרטיים, למטבח, סלון וחדרי שינה.


מק"ט - 17840324

דגם - XSD-PB14-50-CCT

קישור לדף מוצר ואביזרים נלווים באתר



**3Years** Guarantee | **VALUE** | 220-240V 50-60Hz | IP3X | מתאים לדרשות התקן הישראלי

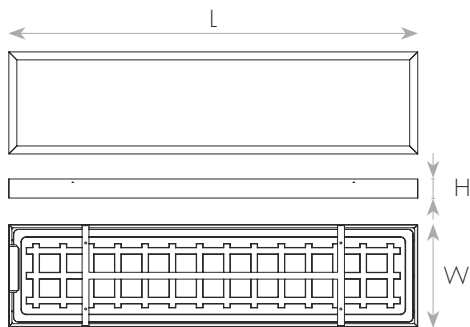

### DIMENSIONS & WEIGHT

### מידות ומשקל

Width	300mm
Length	1200mm
Height	38mm
Product weight	2200g

### MATERIALS & COLORS

### מבנה וגימור

Product color	white
Body material	iron
Protection class IEC 62262	IK03
Cover finishing	milky
Cover material	PS
Lens material	PMMA

## ELECTRICAL DATA

## נתונים חשמליים

Nominal wattage	50W
Nominal current	0.21A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	External LED driver
Driver manufacturer	AGT
Driver model	AGT-M5-I50-1200
Driver output current	1200mA
Dimmable driver mode	No
Power factor	>0.96
THDi	<10%
Output ripple current	≤1%
Optional driver ON/OFF	LF 17900114
Optional driver 1-10V	LF 17900211
Optional driver DALI	LF 17900254

## APPLICATION & MOUNTING

## יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	0...+44°C

## CERTIFICATES & STANDARDS

## תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP20
Protection class IK 62262 (shock resistance)	IK03
ISO 9001	√
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4

## PERFORMANCE

## ביצועים

Lifespan (Hr)	30000Hrs
---------------	----------

## PHOTOMETRIC DATA

## אופטיקה

Luminous efficacy	116Lm/W
Luminous flux	5050/5800/5300Lm
CCT	3000/4000/6000K
CRI	>82
LED manufacturer	JF
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
UGR level	<21
Efficiency	100%