# צמוד תקרה לבן RING-S 60W 78CM 3CCT

סדרת צמודי תקרה בעיצוב יוקרתי ונוכחות מהפנטת עם שלושה גווני אור בגוף אחד לבחירה - חם, ניטרלי או קר. כיסוי אופטי חלבי המייצר אחידות אורית ומונע סנוור, מעניק תאורה נעימה המשתלבת בצורה מושלמת בעיצוב החלל. הגוף מספק שטף אורי גבוה, חסכוני בצריכת חשמל ובתחזוקה. כולל דרייבר ללא ריצוד איכותי ואמין. להארת חדרי מגורים, מבני ציבור, בתי מלון, מסעדות, אולמות אירועים ועוד.

מק"ט - 74062613
דגם - 5367-860RC
קישור לדף מוצר ואביזרים נלווים באתר

3 Years Guarantee | VALUE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי

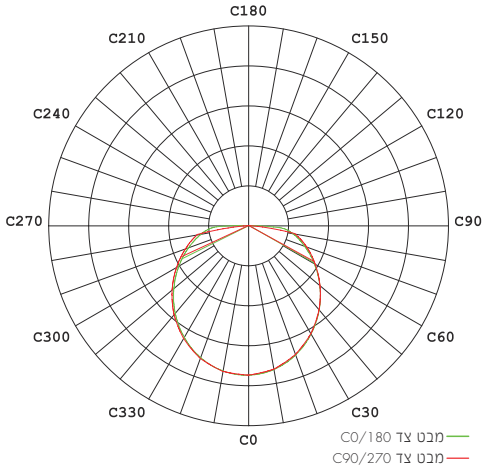

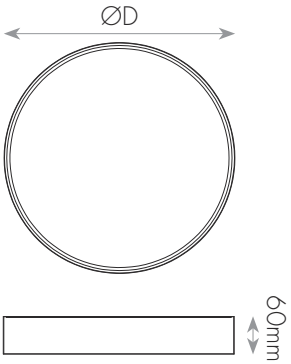


| DIMENSIONS & WEIGHT | מידות ומשקל |
|---|---|
| Height | 60mm |
| Diameter | 780mm |
| Product weight | 4900g |

| MATERIALS & COLORS | מבנה וגימור |
|---|---|
| Product color | white |
| Body material | aluminum |
| Cover finishing | milky |
| Cover material | PC |

NISKO

## ELECTRICAL DATA / נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 60W |
| Nominal current | 0.29A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 1 |
| Operating mode | Internal LED driver |
| Driver manufacturer | LIFUD |
| Driver model | LF-GIF060YA(H)1500H |
| Driver output current | 1500mA |
| Dimmable driver mode | No |
| Power factor | >0.97 |
| THDi | <20% |
| Output ripple current | ≤0.5% |
| Inrush current | 60A |
| Inrush current time $T_{h50}$ | 350µs |
| Optional driver DALI | LF 17900254 |

## CERTIFICATES & STANDARDS / תקנים

| | |
|---|---|
| Nisko Class | VALUE 3 Years |
| Israeli Standard | Ta=25°C<br>IS 20-1<br>IS 20-2-1 |
| CE | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | √ |
| IP 60529 | IP20 |
| Green Building | √<br>RoHS |
| ISO 9001 | √ |

## APPLICATION & MOUNTING / יישומים

| | |
|---|---|
| Application environment | Indoor |
| Mounting type | Surface |
| Mounting location | Ceiling |
| Type of protection | IP20 |
| Ambient temperature range | -10...+50°C |

## PERFORMANCE / ביצועים

| | |
|---|---|
| Lifespan (Hr) | 120000Hrs |
| Driver lifespan | 120000Hrs |

## PHOTOMETRIC DATA אופטיקה

| | |
|---|---|
| Luminous efficacy | 88Lm/W |
| Luminous flux | 4850/5250/5050Lm |
| CCT | 3000/4000/6500K |
| CRI | >80 |
| LED manufacturer | EPISTAR |
| Chip type | SMD 2835 |
| Beam angle | 120° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין