צמוד תקרה צילינדר שחור ONYX 10W 3CCT

סדרת צילינדרים צמודי תקרה. מבנה אלומיניום איכותי בעיצוב נקי, איכות אורית גבוהה במיוחד CRI>90, שילוב של עדשת HONEYCOMB לפיזור עדין ורך או זכוכית חלבית איכותית להבטחת פיזור אור אחיד ולמניעת סנוור. הגוף מתאים להתקנה בבתי מגורים, גלריות, בתי מלון, שטחים מסחריים, מסעדות ועוד.

מק"ט - 75410406
דגם - UNI-ICSM-0025-10W 3CCT 80°/45° BLACK
קישור לדף מוצר ואביזרים נלווים באתר

3 Years Guarantee | VALUE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי

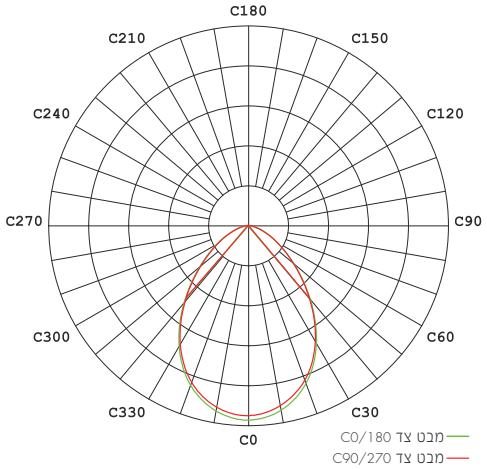



DIMENSIONS & WEIGHT	מידות ומשקל
Height	64mm
Diameter	79mm
Product weight	210g

MATERIALS & COLORS	מבנה וגימור
Product color	black
Body material	aluminum
Cover finishing	Frosted
Cover material	glass

NISKO

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	9.7W
Nominal current	0.06A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Dimmable driver mode	No
Power factor	>0.75

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP20
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	-10...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	77Lm/W
Luminous flux	750(4K)Lm
CCT	3000/4000/6000K
CRI	>90
LED manufacturer	TYF
Chip type	SMD 3030
Beam angle	80°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ