


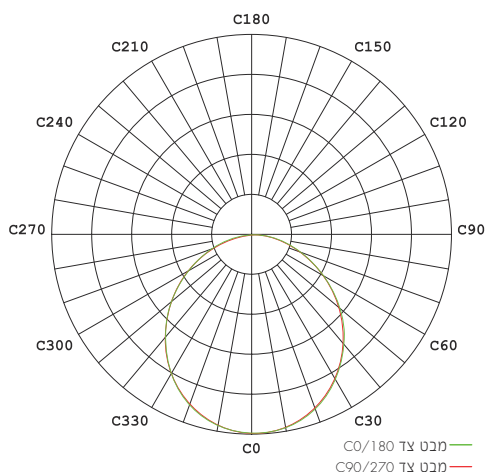

סדרת האיכות של שקועי לד מבית LEDVANCE העולמית. פתרון חסכוני משמעותי בצריכת החשמל. יעילות אורית גבוהה של עד 100Lm/W. עיצוב דק, פונקציונלי ומינימליסטי. כיסוי אופטי חלבי. להארת מסדרונות, מבואות, שטחים מסחריים, תאורה כללית ועוד.

מק"ט - 10586013

דגם - 4058075681033

קישור לדף מוצר ואביזרים נלווים באתר



2 YEAR GUARANTEE

220-240V
50-60Hz



IP20




IP44



IK03

מומחים לרדישנות
התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Height	42mm
Diameter	115mm
Product weight	70g
Cut hole diameter	100mm

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	Plastic
Protection class IEC 62262	IK03
Cover finishing	milky
Cover material	PMMA



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	8W
Nominal current	0.06A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Dimmable driver mode	No
Power factor	>0.5

CERTIFICATES & STANDARDS

תקנים

Nisko Class	ECO 2 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-2
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
TM21	√ Ta=25°C
IP 60529	IP20/IP44
Protection class IK 62262 (shock resistance)	IK03
Green Building	ISO 14001
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP20/IP44
Ambient temperature range	-20...+40°C

PERFORMANCE

ביצועים

TM21	√ Ta=25°C
Lifespan L70	>25000Hrs

NISKO



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	100Lm/W
Luminous flux	800Lm
CCT	3000K
CRI	>80
LED manufacturer	Bridgelux
Chip type	SMD 2835
SDCM	≤6
Beam angle	110°
CIE class	Direct
Efficiency	100%