


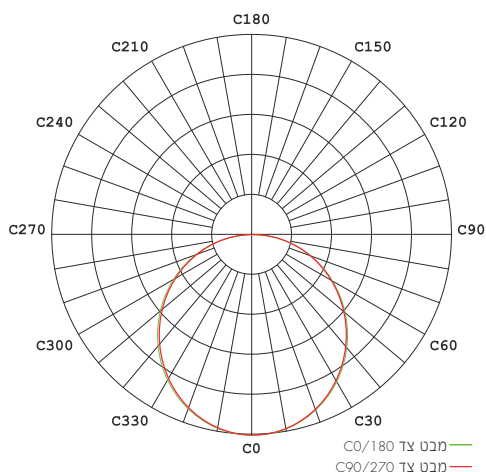

סדרת גופי תאורת לד שקועי תקרה מבית LEDVANCE העולמית. אחידות אורית מושלמת, עיצוב פונקציונלי ומינימליסטי, צר ונמוך מאוד! בהתאמה לתקרות גבס. מחברים מהירים ודרייבר חיצוני לגמישות מירבית ולקלות בהתקנה. להארת חדרי שירותים, מסדרונות, מבואות ותאורה כללית.

מק"ט - 10585204

דגם - 4058075064003

קישור לדף מוצר ואביזרים נלווים באתר



5 YEAR GUARANTEE



PRO

220-240V
50-60Hz




IP20



IK03

מחברים לרשימות
התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Height	23mm
Diameter	225mm
Product weight	350g
Cut hole diameter	205mm

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	aluminum
Protection class IEC 62262	IK03
Cover finishing	milky
Cover material	PMMA
Lens material	PMMA

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	22W
Nominal current	0.19A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver output current	390mA
Dimmable driver mode	No
Power factor	>0.90
THDi	<20%
Inrush current	11A
Inrush current time T_{h50}	533μs
Max. no. of lum. On circuit break. B16 A	11
Max. no. of lum. On circuit break. C10 A	11
Max. no. of lum. On circuit break. C16 A	18

APPLICATION & MOUNTING

יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	-20...+40°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-2
CB	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
Protection class IK 62262 (shock resistance)	IK03
Green Building	ISO 14001 √
ISO 9001	√

PERFORMANCE

ביצועים

Lifespan (Hr)	50000Hrs
---------------	----------

NISKO



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	84Lm/W
Luminous flux	1850Lm
CCT	3000K
CRI	>80
LED manufacturer	Bridgelux
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%