


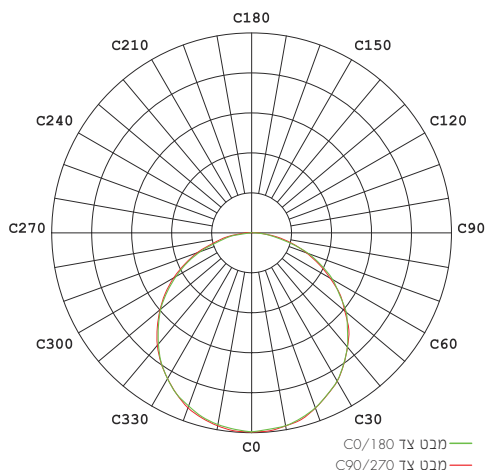

סדרת שקועי תקרה עם תאורת לד צידית SIDELIGHT. יעילות אורית גבוהה 100Lm/W, לצד אחידות אורית מרשימה המושגת בזכות פיזור אור אחיד ושימוש באופטיקה מעולה. עדשה אקרילית מחומר עמיד UV והגוף עשוי יציקת אלומיניום איכותי. דרייבר חיצוני והתקנה קלה. להארה במבואות, משרדים, בתי ספר, מוסדות, שטחים מסחריים, תאורה כללית ועוד.

מק"ט - 17840413

דגם - XSD-RP600-48W-42K

קישור לדף מוצר ואביזרים נלווים באתר



3 YEAR
GUARANTEE




VALUE

220-240V
50-60Hz



IP20

מחירים לרשימת
התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Height	30mm
Diameter	600mm
Product weight	720g
Cut hole diameter	585mm

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	aluminum
Cover finishing	milky
Cover material	Acrylic Prismatic



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	48W
Nominal current	0.2A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LFGIF050YS1200H
Driver output current	1200mA
Dimmable driver mode	No
Power factor	>0.95
THDi	<20%
Output ripple current	≤1%
Inrush current	35A
Inrush current time T _{h50}	180µs
Max. no. of lum. On circuit break. B10 A	15
Max. no. of lum. On circuit break. B16 A	24
Max. no. of lum. On circuit break. C10 A	25
Max. no. of lum. On circuit break. C16 A	41
Optional driver ON/OFF	LF 17900112 LF 17900114 LDV 10025040
Optional driver 1-10V	LF 17900218
Optional driver DALI	LF 17900254

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-2
CB	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP20
ISO 9001	√
מחירון דקל	88.082.0140



APPLICATION & MOUNTING

יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	-4...+50°C

PERFORMANCE

ביצועים

Lifespan (Hr)	45000Hrs
Driver lifespan	45000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	100Lm/W
Luminous flux	4800Lm
CCT	4000K
CRI	>80
LED manufacturer	JF
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%