



סדרת גופי תאורת מראה בעיצוב יוקרתי ובדרגת אטימות IP54. גופים אלגנטיים המספקים שטף אורי גבוה, לצד שלושה גוני אור לבחירה. להתקנה נוחה ומהירה בחדרי אמבטיה, מקלחונים ועוד.

מק"ט - 70338027

דגם - ML31-600-15W-C3

קישור לדף מוצר ואביזרים נלווים באתר




3Years
Guarantee

100-240V
50-60Hz



IP54

מתאים לדרשות
התקן הישראלי

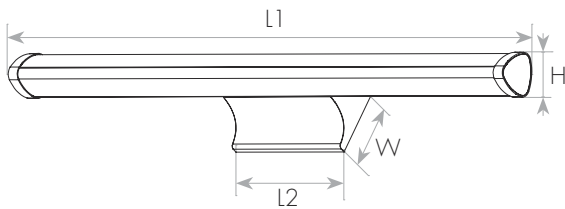

DIMENSIONS & WEIGHT

מידות ומשקל

Width	39mm
Length	600mm
Height	39mm
Product weight	620g

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	aluminum
Cover finishing	milky

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	15W
Nominal current	0.07A
Nominal voltage	100-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver output current	380mA
Dimmable driver mode	No
Power factor	>0.91
THDi	<10%

CERTIFICATES & STANDARDS

תקנים

Nisko Class	ECO 3 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP54
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Wall
Type of protection	IP54
Ambient temperature range	0...+45°C

PERFORMANCE

ביצועים

Lifespan (Hr)	50000Hrs
---------------	----------

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	120Lm/W
Luminous flux	1800Lm
CCT	3000/4000/5700K
CRI	>80
LED manufacturer	Hongli Zhihui
Chip type	SMD 2835
Beam angle	110°
Efficiency	100%